

OK7Q



Product parameters

OPTICS

7 x 15W high power LEDs

RGBW 4 in 1 LED make extremely even and smooth color mixing effect

Extremely Long Life: 50,000H and low power consumption

MOVEMENT

Pan movement: 540 ° /630 ° optional (16 bit)

Tilt movement: 265 ° (16 bit)

Advanced moving system: fast, stable and quiet, auto X-Y repositioning

COLORS

Excellent color mixing and rainbow effect

Color temperature linear adjust from 2700K to 8000K, preset color temperature scenes with : 2700K,3200K,4300K, 5600K,6500K,8000K options

FEATURES

3 Control channel modes: 17/15/21 channels

3 operational modes: DMX-512, Master/Slave & Sound Active

Beam angle: 8 ° ,field angle: 13 °

Strobe effect with 1-25 flashes per second and pulse effect

General dimming and blackout for all four colors

DISPLAY

Friendly touch full color LCD display,with rechargeable battery

locked automatically after 15 seconds from the last button press to prevent

incorrect operation, long press menu button for 3 seconds to activate keys again

Humanized reset detection set: long press menu and enter button to lock pan/tilt reset, can support fixtures do the reset detection in flight case

SOFTWARE

7 pre-built programs can be selected

the speed of internal programs are adjustable

Remote DMX addressing, lamp on/off, reset, sound control switch by controller

Software upgrade: through DMX cable conveniently, quickly upgrade software

OTHER SPEC

Advanced RDM function

POWER

AC100-240V, 50/60HZ

DIMENSIONS AND WEIGHT

Packing dimension: 43.5x33x26cm


Net Weight: 5 kgs

Gross Weight: 7.5 kgs

Colours/ Gobos

:
:
:


Dimensions

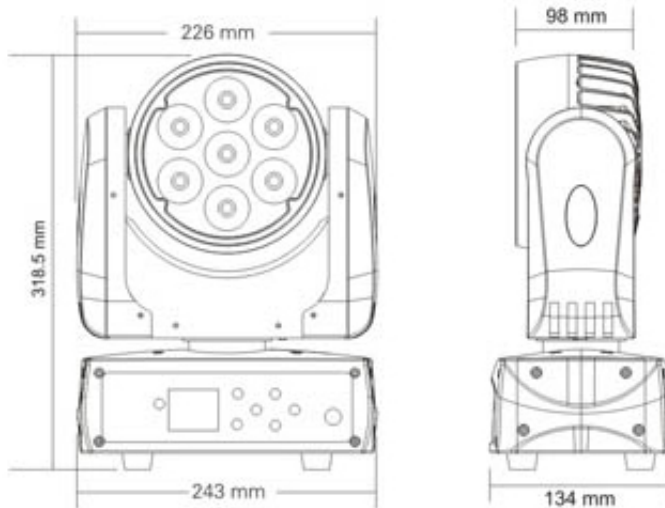

Photometrics

Beam angle 8°
Field angle 13°
Intensity LUX(max.)

Red leds	2798	1344	775
Green leds	8546	4028	2323
Blue leds	1200	570	330
White leds	10430	4845	2788
Full leds	21430	9600	5680

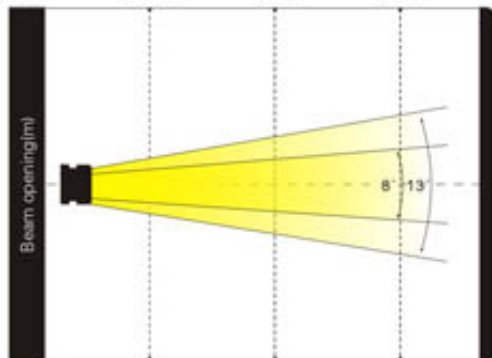

Distance(m)	2	3	4
8° Diameter(mm)	∅0.26	∅0.39	∅0.52
13° Diameter(mm)	∅0.46	∅0.69	∅0.92

Errors and omissions are possible. All specifications are subject for change without prior notice.